MAYTAG
COMMERCIAL

Commercial Neptune® super-capacity dryers

Maytag Computer Trac® controls are easy to program and provide simple one-touch cycle selection. Promotionally minded owners can adjust prices by day and time — and increase revenue with a "top off" option that adds drying time.

Models MDE/MDG21PD

Maytag® Commercial Neptune® super-capacity single-load dryers perform in sync with larger-capacity washers — like Maytag® Commercial Neptune® high-efficiency front-load washers — to reduce waiting times between washing and drying. With a large drum and a powerful 220-cubic-foot-per-minute diagonal airflow, laundry billows open to dry quickly and efficiently for excellent results. And the big-load door opening makes it easy to load and unload bulky items.

microprocessor coin-drop

Customers see coin countdown and time remaining in cycle!

For Your Customers:

- Super capacity handles big and bulky loads.
- Extra-large opening — door opens 180˚ for easy loading and unloading.
- Display counts down time remaining in cycle.
- Canadian model equipped with dual coin-drop operation.
- Meets ADA accessibility guidelines.

For Your Operation:

- Extra-large security coin vault for convenience.
- Convenient front access for do-it-yourself service.
- Premium porcelain-enamel top and Tri-Coat™ cabinet protection keep the dryer looking new.
- Microprocessor coin-drop measures coin size, weight and drop speed to help prevent slugging.
- Optional audit system with two-way data communication.
- Debit card-compatible controls.

Models MDE/MDG21PD

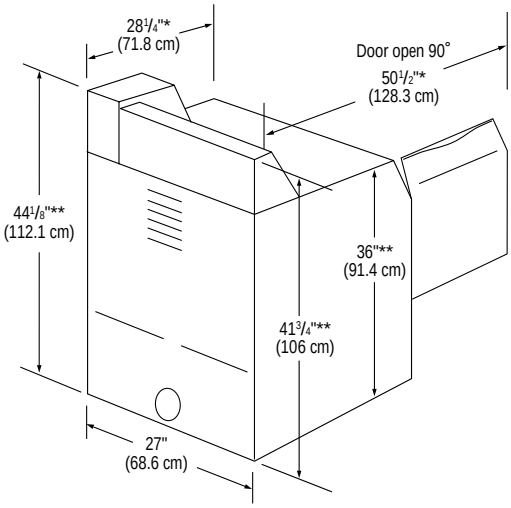

*Includes hinge on back of dryer.

**Dimensions will vary according to adjustment of leveling legs; add 2" min.

NEW YORK CITY M.E.A.

See specific instructions for proper installation.
Specifications are subject to change without notice.

Motor: ¼ HP, 240 volts (MDE) or 120 volts (MDG), 60 Hz, single-phase, thermoprotected against overload, auto-reset. Export models — 240 volts, 50 Hz and 220 volts, 60 Hz.

Capacity: 6.0 cubic feet (0.17 cu. m).

Tumble Speed: 50 ± 1.5 rpm.

Lubrication: Permanent — needs no oil.

Airflow: 220 cubic feet (6.2 cu. m) per minute. Export models — 180 cubic feet (5.0 cu. m) per minute.

Exhaust: Use a minimum of 4-inch (10.2 cm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal or combustible duct.

Heating Element (MDE Models): Nichrome helix coil.

Electrical Rating (MDE Models): 120/240 volts, AC, 60 Hz, draws approximately 5,900 watts overall. Export models draw approximately 4,900 watts.

Single Port Burner (MDG Models): Automatic electric burner ignition.

Gas Rating (MDG Models): 24,000 BTU/hr.

Fuse Requirements:
MDE models — 30 amp.
Export models — 20 amp.
MDG models — 15 amp.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	 4" (10.2 cm)	 2½" (6.4 cm)
Maximum length of 4-inch diameter rigid metal duct.		
0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)
Maximum length of 4-inch diameter flexible stiff-walled metal duct.		
0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)

Leveling Legs: Adjustable to level dryer for proper installation.

Color: White.

Approximate Weight (Crated/Uncrated): 163 lbs. (74 kg)/144 lbs. (65 kg).

Quality Features



Fast And Efficient Drying

Our 220-cubic-foot-per-minute diagonal airflow means fast and efficient drying performance, even with difficult installations.

Large-Capacity Lint Filter

Durable fine-mesh polyester lint filter is located just inside the door opening for quick and convenient lint removal.

Easy-Access Reversible Door

The door handle is located at the top for convenience, and the extra-large opening makes loading laundry simple.

Cushioned Drum Suspension

Permanently lubricated bearings. The cushioned drum rollers assure year after year of smooth, quiet and reliable operation.

Maytag® Limited Warranty

2 YEARS — **All parts**

5 YEARS — **External cabinet against rust-through, including the top, baseframe and dryer door**

For a period from the date of original purchase through the times listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

MAYTAG® COMMERCIAL